



Luoyang JCB Bearing Technology Company Limited

HS6-29N1Z

SLEWING BEARING

FOUR-POINT CONTACT BALL SLEWING BEARING





Luoyang JCB Bearing Technology Company Limited

CONTENTS

01.

[MAIN SPECIFICATION](#)

02.

[TECHNICAL INFORMATION](#)

03.

[MANUFACTURE & INSPECTION](#)

04.

[PACKING AND STORAGE](#)

05.

[WARRANTY & CERTIFICATE](#)



Luoyang JCB Bearing Technology Company Limited

HS6-29N1Z

01

MAIN SPECIFICATION



[REFERENCE DRAWING](#)



[LUBRICATIONA](#)



[SPECIFICATION](#)



[BOLT HOLES TYPE & BOLTS](#)



[RAW MATERIAL](#)



[CORROSION PROTECTION](#)




Luoyang JCB Bearing Technology Company Limited

HS6-29N1Z

REFERENCE DRAWING

This drawing is reference for user, if user request for formal drawing , please contact with us: sales@jcb-bearing.com, the official drawing will be submitted to them.

01-1

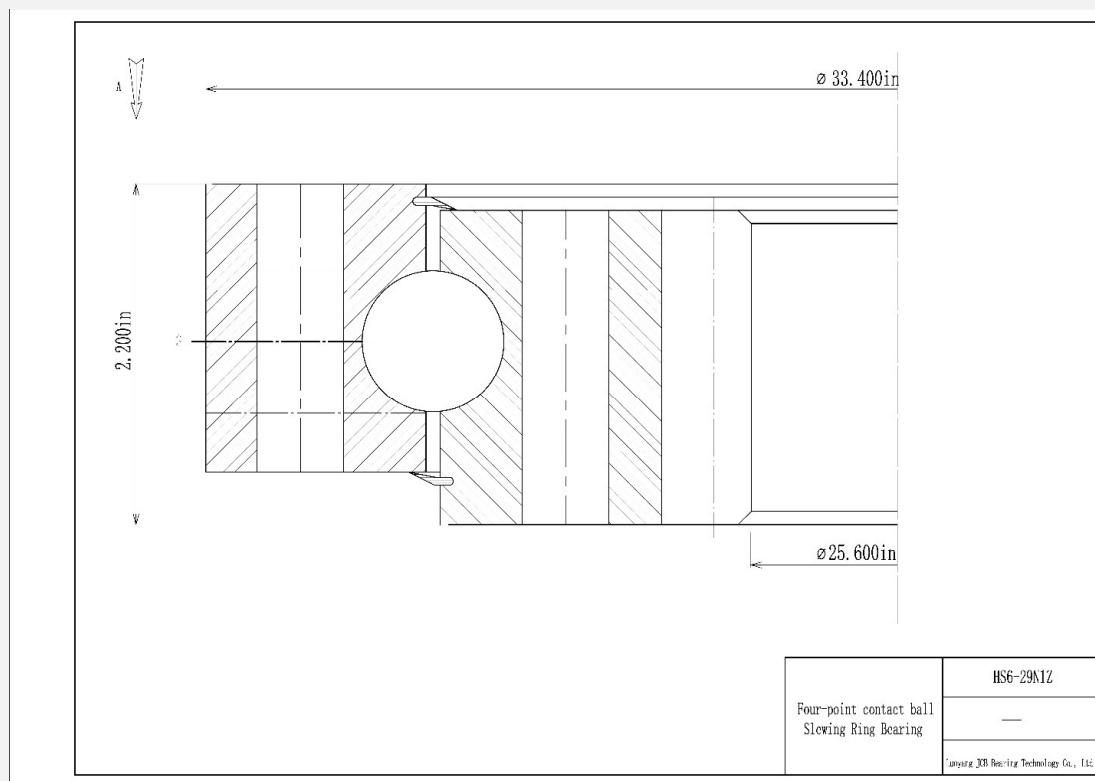



01-2

Luoyang JCB Bearing Technology Company Limited

SPECIFICATION



HS6-29N1Z

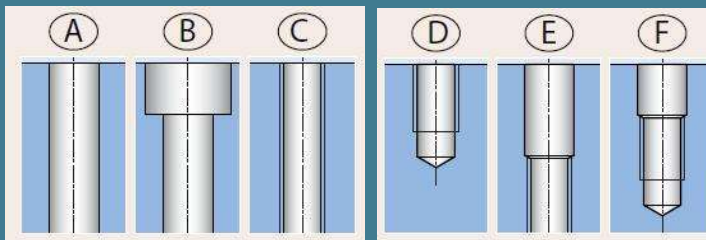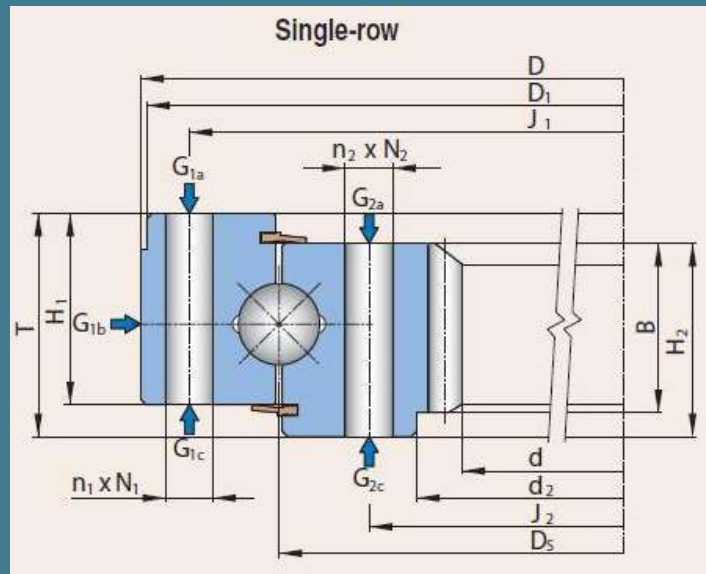

Inner diameter (d): 25.600 in
 Outer diameter (D): 33.400 in
 Overall height (T): 2.200 in
 Outer ring height (H1): 1.800 in
 Inner ring height (H2): 1.800 in
 Weight: 171 lbs
 External bolt circle dia (J1): 32.000 in
 Number of bolt holes per hole circle (n1):15
 External bolt hole type : Selected by user
 External bolt hole diameter (N1): 0.688 in
 Internal bolt circle dia (J2): 27.630 in
 Number of bolt holes per hole circle (n2):28
 Internal bolt hole type : Selected by user
 Internal bolt hole diameter (N2): 0.688 in
 Tooth number (z):104
 Module of gear (DP):4
 Tooth width (B): 1.800 in