



**Luoyang JCB Bearing Technology Company Limited**

**HT10-30P1Z**

**SLEWING BEARING**

**FOUR-POINT CONTACT BALL SLEWING BEARING**





# Luoyang JCB Bearing Technology Company Limited

## CONTENTS

01.

[MAIN SPECIFICATION](#)

02.

[TECHNICAL INFORMATION](#)

03.

[MANUFACTURE & INSPECTION](#)

04.

[PACKING AND STORAGE](#)

05.

[WARRANTY & CERTIFICATE](#)



**Luoyang JCB Bearing Technology Company Limited**

**HT10-30P1Z**

01

## MAIN SPECIFICATION



[REFERENCE DRAWING](#)



[LUBRICATION](#)



[SPECIFICATION](#)



[BOLT HOLES TYPE & BOLTS](#)



[RAW MATERIAL](#)



[CORROSION PROTECTION](#)




**Luoyang JCB Bearing Technology Company Limited**

**HT10-30P1Z**

## REFERENCE DRAWING

This drawing is reference for user, if user request for formal drawing , please contact with us: [sales@jcb-bearing.com](mailto:sales@jcb-bearing.com), the official drawing will be submitted to them.

01-1

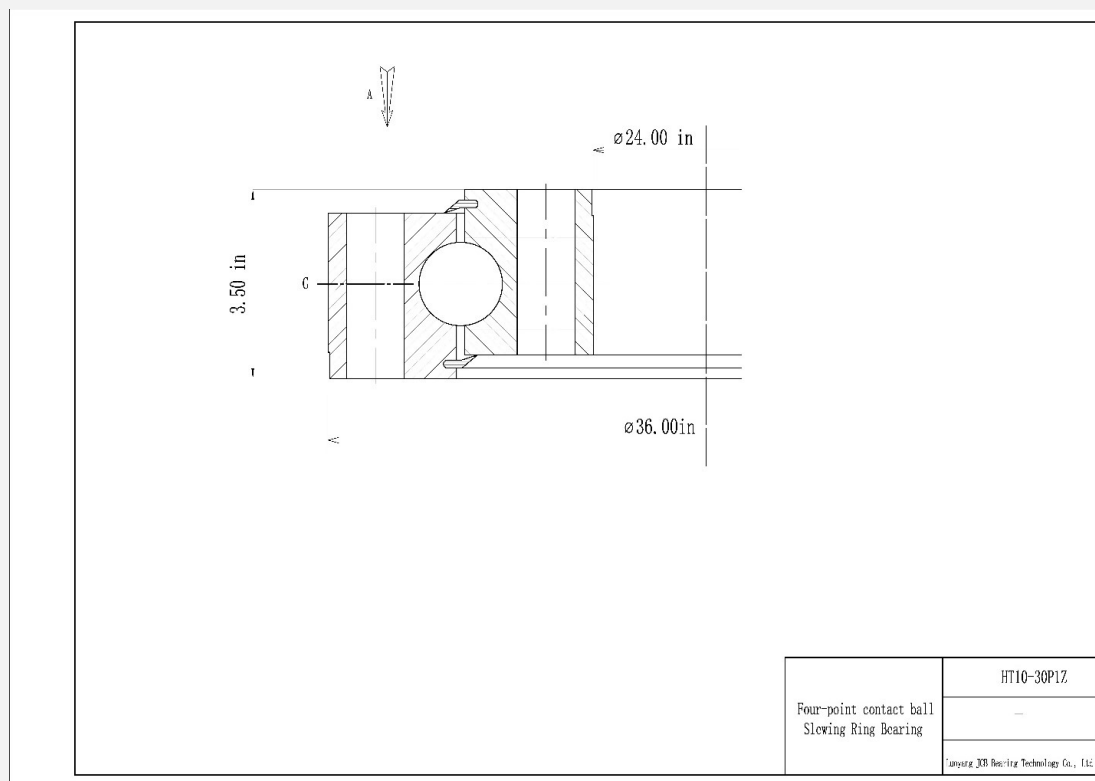



01-2

# Luoyang JCB Bearing Technology Company Limited

## SPECIFICATION



### HT10-30P1Z

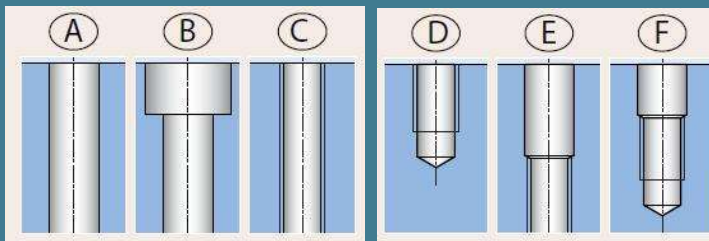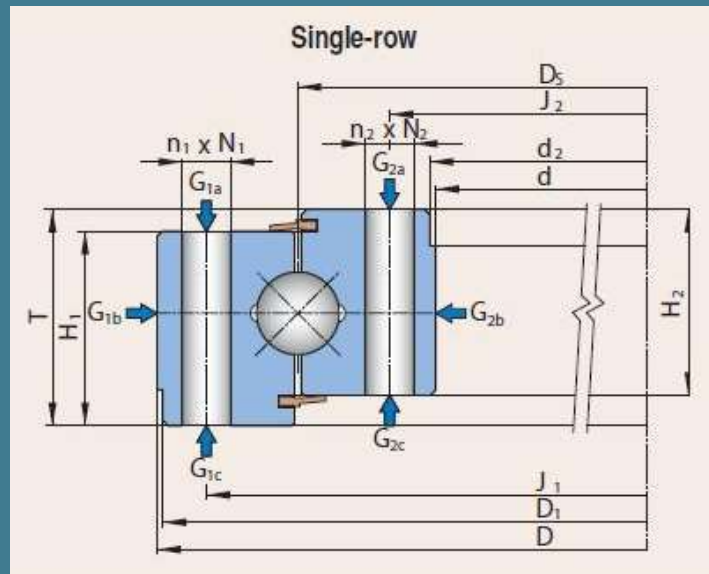

Inner diameter (d): 24.000 in  
 Outer diameter (D): 36.000 in  
 Overall height (T): 3.500 in  
 Outer ring height (H1): 3.000 in  
 Inner ring height (H2): 3.000 in  
 Weight: 447 lbs  
 External bolt circle dia (J1): 33.250 in  
 Number of bolt holes per hole circle (n1):24  
 External bolt hole type : Selected by user  
 External bolt hole diameter (N1): 0.813 in  
 Internal bolt circle dia (J2): 26.750 in  
 Number of bolt holes per hole circle (n2):30  
 Internal bolt hole type : Selected by user  
 Internal bolt hole diameter (N2): 0.813 in