



Luoyang JCB Bearing Technology Company Limited

L6-29E9ZD

SLEWING BEARING

FLANGED FOUR-POINT CONTACT BALL SLEWING BEARING





Luoyang JCB Bearing Technology Company Limited

CONTENTS

01.

[MAIN SPECIFICATION](#)

02.

[TECHNICAL INFORMATION](#)

03.

[MANUFACTURE & INSPECTION](#)

04.

[PACKING AND STORAGE](#)

05.

[WARRANTY & CERTIFICATE](#)



Luoyang JCB Bearing Technology Company Limited

L6-29E9ZD

01

MAIN SPECIFICATION



[REFERENCE DRAWING](#)



[LUBRICATIONA](#)



[SPECIFICATION](#)



[BOLT HOLES TYPE & BOLTS](#)



[RAW MATERIAL](#)



[CORROSION PROTECTION](#)




Luoyang JCB Bearing Technology Company Limited

L6-29E9ZD

REFERENCE DRAWING

This drawing is reference for user, if user request for formal drawing , please contact with us: sales@jcb-bearing.com, the official drawing will be submitted to them.

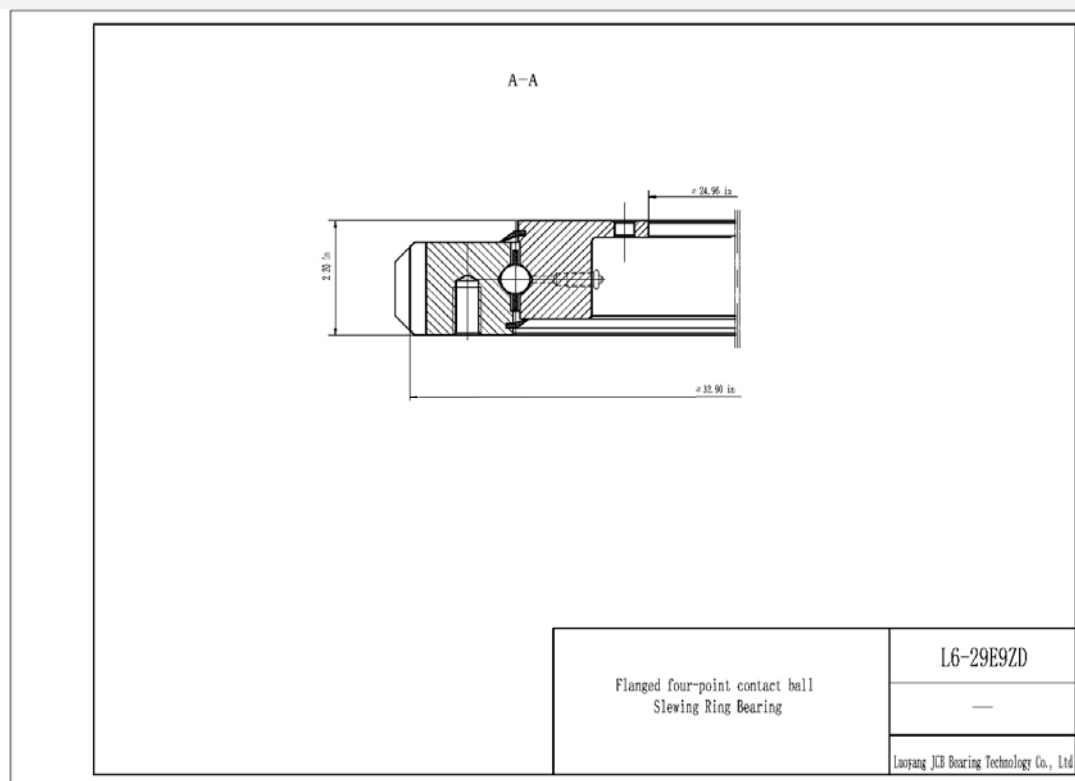


01-2

Luoyang JCB Bearing Technology Company Limited

SPECIFICATION



L6-29E9ZD

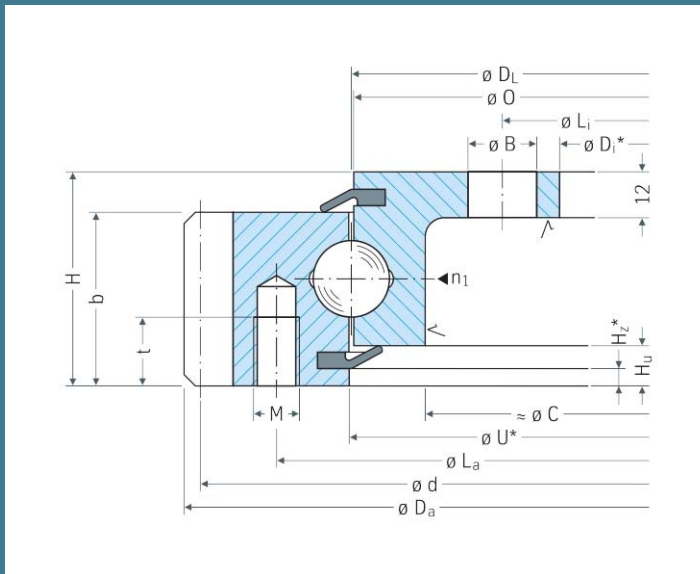

Inner diameter (Di): 24.96 in
 Outer diameter (Da): 32.90 in
 Overall height (H) : 2.20 in
 Outer ring height (b): 1.79 in
 Distance at bottom inner ring(Hu): 0.41 in
 Height(H4): 0.47 in
 Weight: 115 lbs
 External bolt circle dia (La): 31.00 in
 Number of bolt holes per hole circle (na):18
 External bolt hole type : Selected by user
 External bolt hole diameter(M): 1/2-13UNC in
 Internal bolt circle dia(Li): 26.13 in
 Number of bolt holes per hole circle(ni):18
 Internal bolt hole type : Selected by user
 Internal bolt hole diameter (B): 11/16 in
 Tooth number(z):130.00
 Module of gear(DP):4
 Tooth width (b): 1.79 in