



Luoyang JCB Bearing Technology Company Limited

RK6-25E1Z

SLEWING BEARING

FLANGED FOUR-POINT CONTACT BALL SLEWING BEARING





Luoyang JCB Bearing Technology Company Limited

CONTENTS

01.

[MAIN SPECIFICATION](#)

02.

[TECHNICAL INFORMATION](#)

03.

[MANUFACTURE & INSPECTION](#)

04.

[PACKING AND STORAGE](#)

05.

[WARRANTY & CERTIFICATE](#)



Luoyang JCB Bearing Technology Company Limited

RK6-25E1Z

01

MAIN SPECIFICATION



[REFERENCE DRAWING](#)



[LUBRICATIONA](#)



[SPECIFICATION](#)



[BOLT HOLES TYPE & BOLTS](#)



[RAW MATERIAL](#)



[CORROSION PROTECTION](#)




Luoyang JCB Bearing Technology Company Limited

RK6-25E1Z

REFERENCE DRAWING

This drawing is reference for user, if user request for formal drawing , please contact with us: sales@jcb-bearing.com, the official drawing will be submitted to them.

01-1

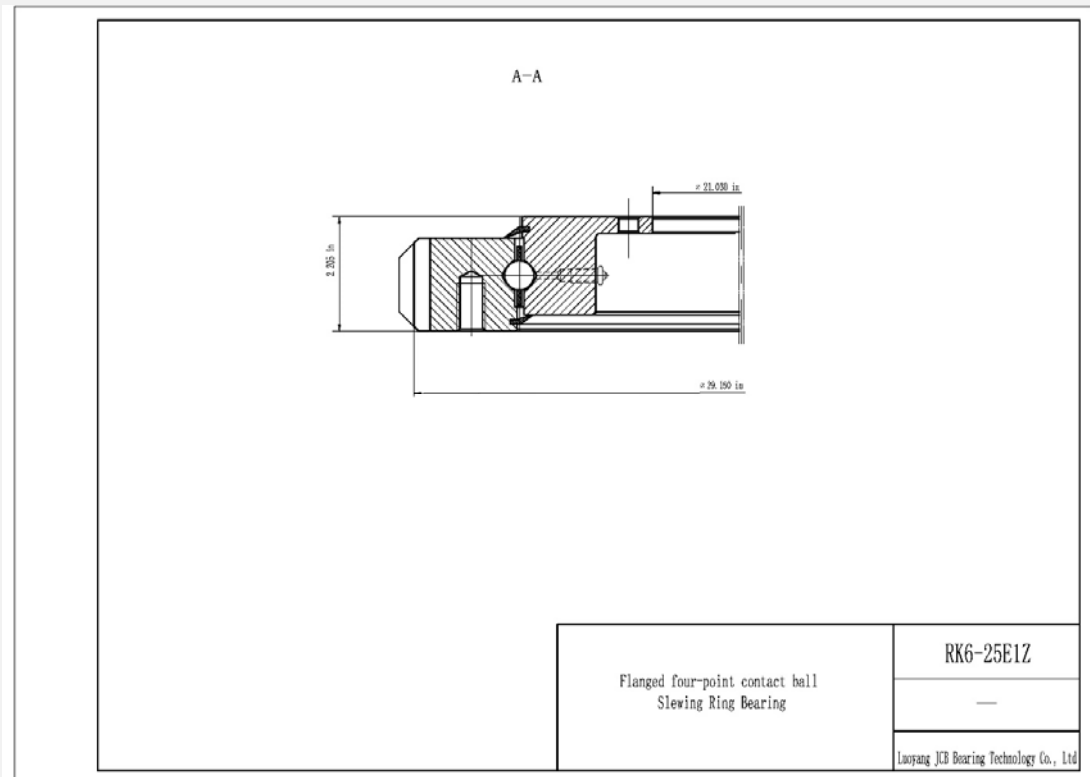



01-2

Luoyang JCB Bearing Technology Company Limited

SPECIFICATION



RK6-25E1Z

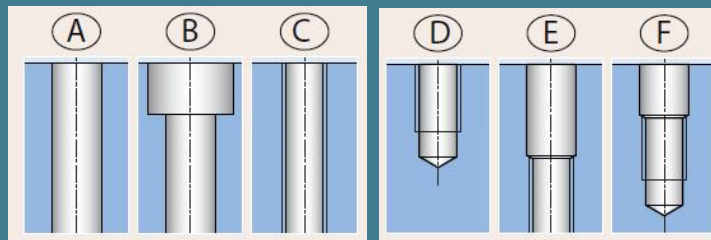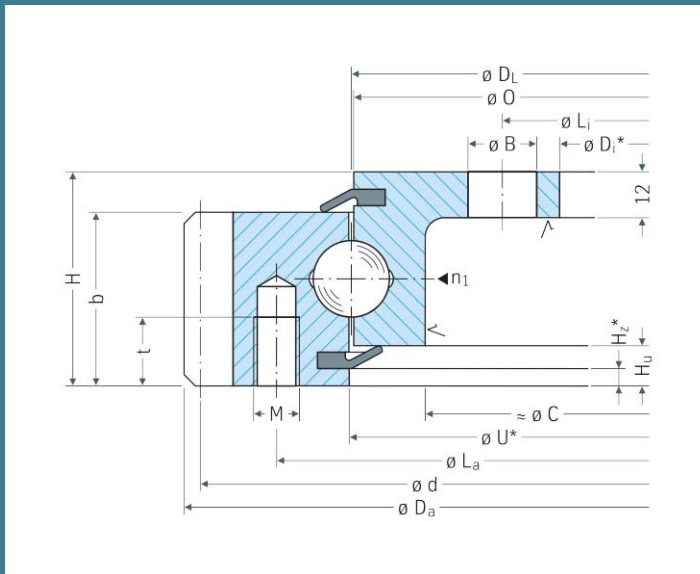

Inner diameter (D_i): 21.030 in
 Outer diameter (D_a): 29.150 in
 Overall height (H): 2.205 in
 Outer ring height (b): 1.811 in
 Distance at bottom inner ring (H_u): 0.394 in
 Height (H_4): 0.470 in
 Weight: 115 lbs
 External bolt circle dia (L_a): 27.250 in
 Number of bolt holes per hole circle (n_a): 15
 External bolt hole type : Selected by user
 External bolt hole diameter (M): 0.500-13UNC-2B in
 Internal bolt circle dia (L_i): 22.130 in
 Number of bolt holes per hole circle (n_i): 18
 Internal bolt hole type : Selected by user
 Internal bolt hole diameter (B): 0.688 in
 Tooth number (z): 115
 Module of gear (DP): 4
 Tooth width (b): 1.811 in