



Luoyang JCB Bearing Technology Company Limited

VLI201094-N-VSP-ZT

SLEWING BEARING

FLANGED FOUR-POINT CONTACT BALL SLEWING BEARING





Luoyang JCB Bearing Technology Company Limited

CONTENTS

01.

[MAIN SPECIFICATION](#)

02.

[TECHNICAL INFORMATION](#)

03.

[MANUFACTURE & INSPECTION](#)

04.

[PACKING AND STORAGE](#)

05.

[WARRANTY & CERTIFICATE](#)



Luoyang JCB Bearing Technology Company Limited

VLI201094-N-VSP-ZT

01

MAIN SPECIFICATION



[REFERENCE DRAWING](#)



[LUBRICATIONA](#)



[SPECIFICATION](#)



[BOLT HOLES TYPE & BOLTS](#)



[RAW MATERIAL](#)



[CORROSION PROTECTION](#)




Luoyang JCB Bearing Technology Company Limited

VLI201094-N-VSP-ZT

REFERENCE DRAWING

This drawing is reference for user, if user request for formal drawing , please contact with us: sales@jcb-bearing.com, the official drawing will be submitted to them.

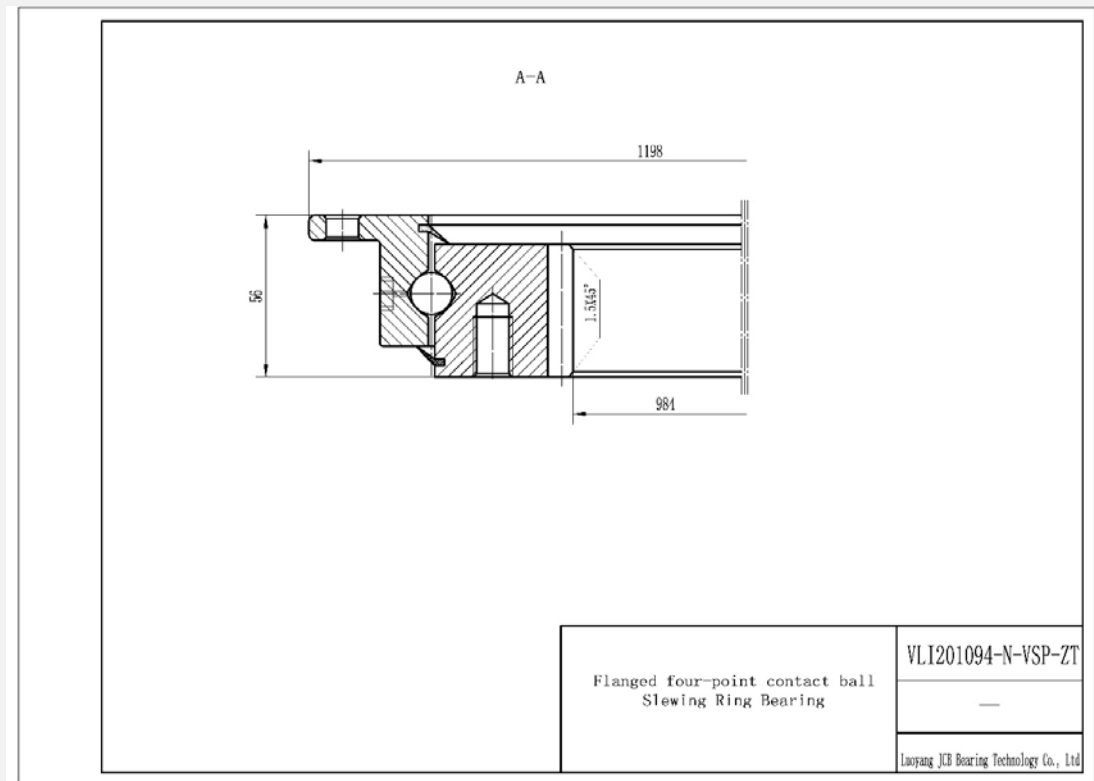



01-2

Luoyang JCB Bearing Technology Company Limited



SPECIFICATION

VLI201094-N-VSP-ZT

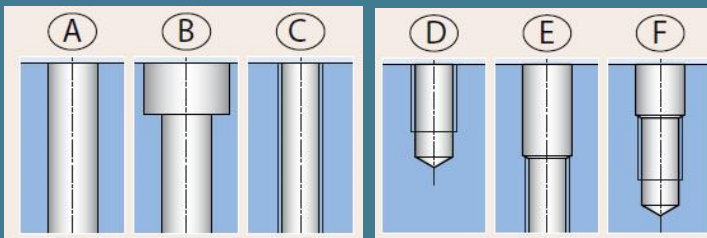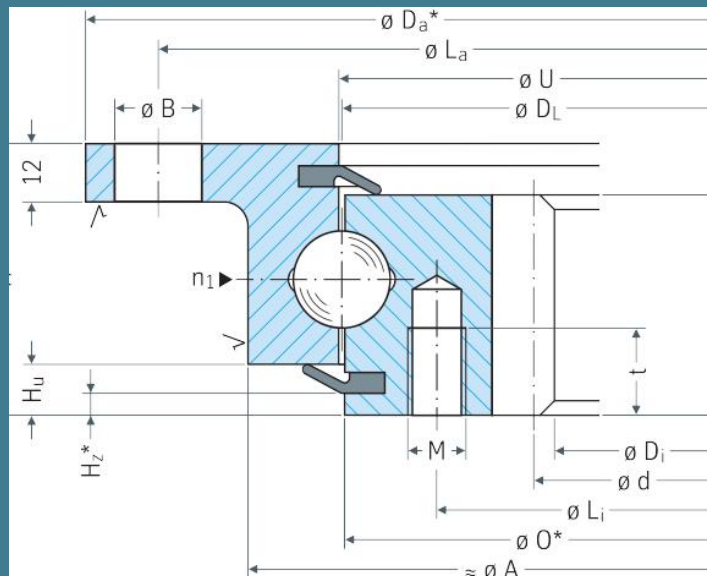

Inner diameter (D_i) : 984
 Outer diameter (D_a) : 1198
 Overall height (H) : 56
 Outer ring height (b): 44.5
 Distance at bottom outer ring(H_u): 8.5
 Height(H_3): 12
 Weight: 81.5 KG
 External bolt circle dia (L_a) : 1170
 Number of bolt holes per hole circle (n_a) : 16
 External bolt hole type : Selected by user
 External bolt hole diameter(B) : 18
 Internal bolt circle dia(L_i): 1055
 Number of bolt holes per hole circle(n_i): 24
 Internal bolt hole type : Selected by user
 Internal bolt hole diameter (M) : M12
 Tooth number(z) : 125
 Module of gear(m) : 8
 Tooth width (b) : 44.5