



**Luoyang JCB Bearing Technology Company Limited**

**VSU251055-VSP**

**SLEWING BEARING**

**FOUR-POINT CONTACT BALL SLEWING BEARING**





# Luoyang JCB Bearing Technology Company Limited

## CONTENTS

01.

[MAIN SPECIFICATION](#)

02.

[TECHNICAL INFORMATION](#)

03.

[MANUFACTURE & INSPECTION](#)

04.

[PACKING AND STORAGE](#)

05.

[WARRANTY & CERTIFICATE](#)



**Luoyang JCB Bearing Technology Company Limited**

**VSU251055-VSP**

01

## MAIN SPECIFICATION



[REFERENCE DRAWING](#)



[LUBRICATIONA](#)



[SPECIFICATION](#)



[BOLT HOLES TYPE & BOLTS](#)



[RAW MATERIAL](#)



[CORROSION PROTECTION](#)




**Luoyang JCB Bearing Technology Company Limited**

**VSU251055-VSP**

## REFERENCE DRAWING

This drawing is reference for user, if user request for formal drawing , please contact with us: [sales@jcb-bearing.com](mailto:sales@jcb-bearing.com), the official drawing will be submitted to them.

01-1

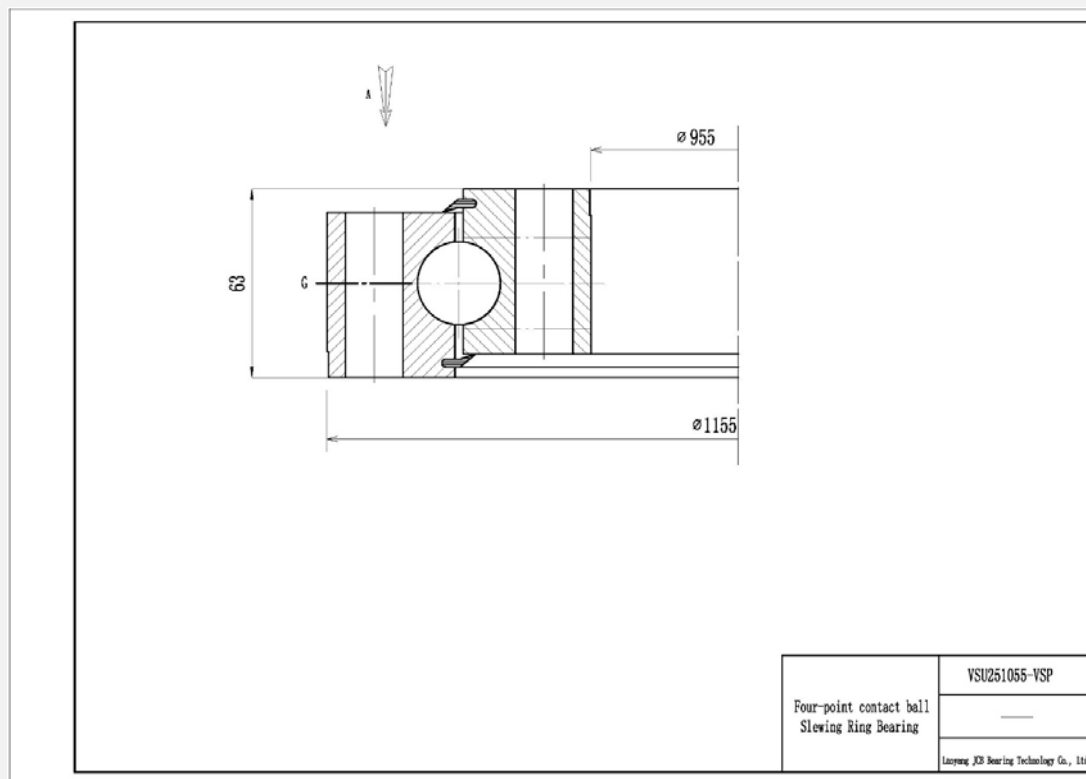



01-2

# Luoyang JCB Bearing Technology Company Limited

## SPECIFICATION



### VSU251055-VSP

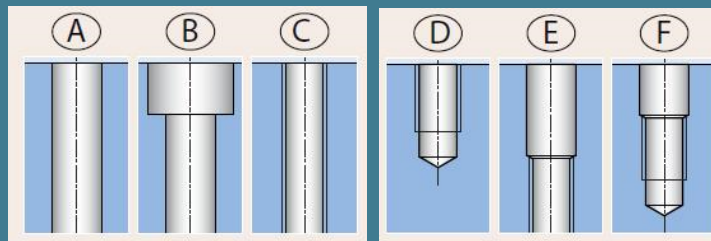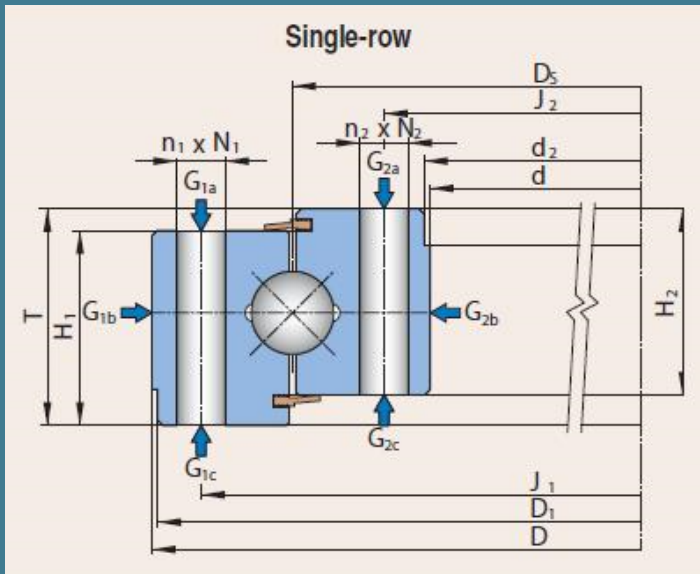

- Inner diameter (d) :955
- Outer diameter (D) :1155
- Overall height (T) :63
- Outer ring height (H1):54
- Inner ring height (H2):54
- Weight: 128 KG
- External bolt circle dia (J1) : 1115
- Number of bolt holes per hole circle (n1) :30
- External bolt hole type : Selected by user
- External bolt hole diameter(N1) :22
- Internal bolt circle dia(J2): 995
- Number of bolt holes per hole circle(n2): 30
- Internal bolt hole type : Selected by user
- Internal bolt hole diameter (N2) :22