



Luoyang JCB Bearing Technology Company Limited

H7-30E1

SLEWING BEARING

DOUBLE ROW BALL SLEWING BEARING





Luoyang JCB Bearing Technology Company Limited

CONTENTS

01.

[MAIN SPECIFICATION](#)

02.

[TECHNICAL INFORMATION](#)

03.

[MANUFACTURE & INSPECTION](#)

04.

[PACKING AND STORAGE](#)

05.

[WARRANTY & CERTIFICATE](#)



Luoyang JCB Bearing Technology Company Limited

H7-30E1

01

MAIN SPECIFICATION



[REFERENCE DRAWING](#)



[LUBRICATIONA](#)



[SPECIFICATION](#)



[BOLT HOLES TYPE & BOLTS](#)



[RAW MATERIAL](#)



[CORROSION PROTECTION](#)




Luoyang JCB Bearing Technology Company Limited

H7-30E1

REFERENCE DRAWING

This drawing is reference for user, if user request for formal drawing , please contact with us: sales@jcb-bearing.com, the official drawing will be submitted to them.

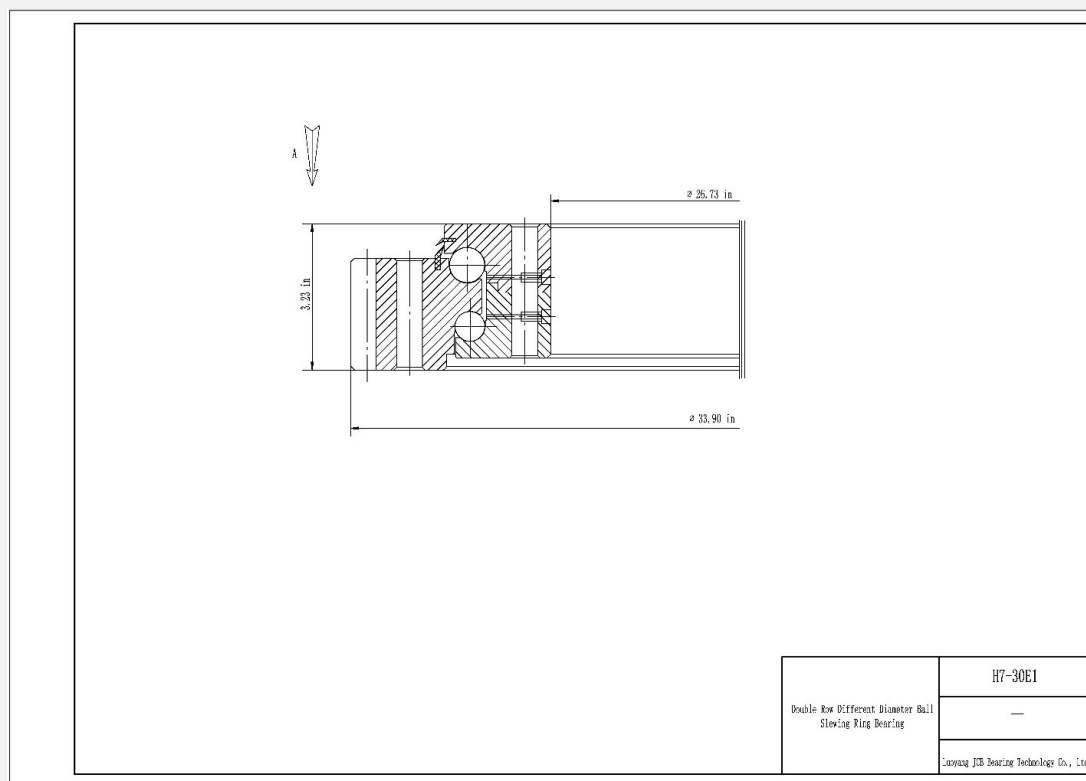



01-2

Luoyang JCB Bearing Technology Company Limited

SPECIFICATION



H7-30E1

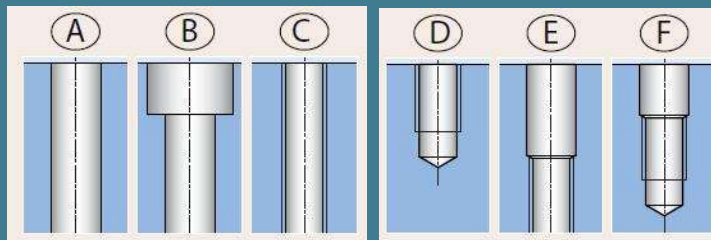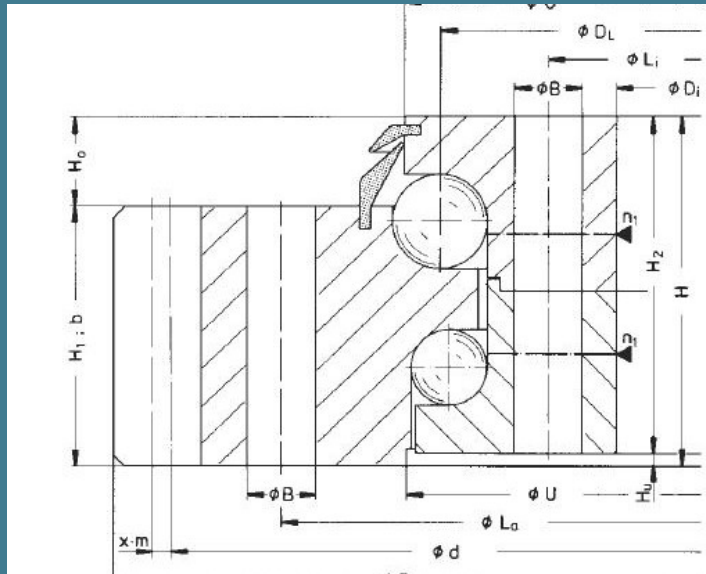

Inner diameter (D_i) :26.73 in
 Outer diameter (D_a) :33.90 in
 Overall height (H) :3.23 in
 Outer ring height (H_1):2.28 in
 Inner ring height (H_2):3.07 in
 Weight: 230 lbs
 External bolt circle dia (L_a) : 31.50 in
 Number of bolt holes per hole circle (n_a) :24
 External bolt hole type : Selected by user
 External bolt hole diameter(B) :5/8-11 in
 Internal bolt circle dia(L_i): 27.80 in
 Number of bolt holes per hole circle(n_i):24
 Internal bolt hole type : Selected by user
 Internal bolt hole diameter (B) :5/8-11 in
 Tooth number(z) :134
 Module of gear(m) :4
 Tooth width (b) : 1.97 in