



Luoyang JCB Bearing Technology Company Limited

I.1050.20.00.C

SLEWING BEARING

FLANGED FOUR-POINT CONTACT BALL SLEWING BEARING





Luoyang JCB Bearing Technology Company Limited

CONTENTS

01.

[MAIN SPECIFICATION](#)

02.

[TECHNICAL INFORMATION](#)

03.

[MANUFACTURE & INSPECTION](#)

04.

[PACKING AND STORAGE](#)

05.

[WARRANTY & CERTIFICATE](#)



Luoyang JCB Bearing Technology Company Limited

I.1050.20.00.C

01

MAIN SPECIFICATION



[REFERENCE DRAWING](#)



[LUBRICATIONA](#)



[SPECIFICATION](#)



[BOLT HOLES TYPE & BOLTS](#)



[RAW MATERIAL](#)



[CORROSION PROTECTION](#)




Luoyang JCB Bearing Technology Company Limited

I.1050.20.00.C

REFERENCE DRAWING

This drawing is reference for user, if user request for formal drawing , please contact with us: sales@jcb-bearing.com, the official drawing will be submitted to them.

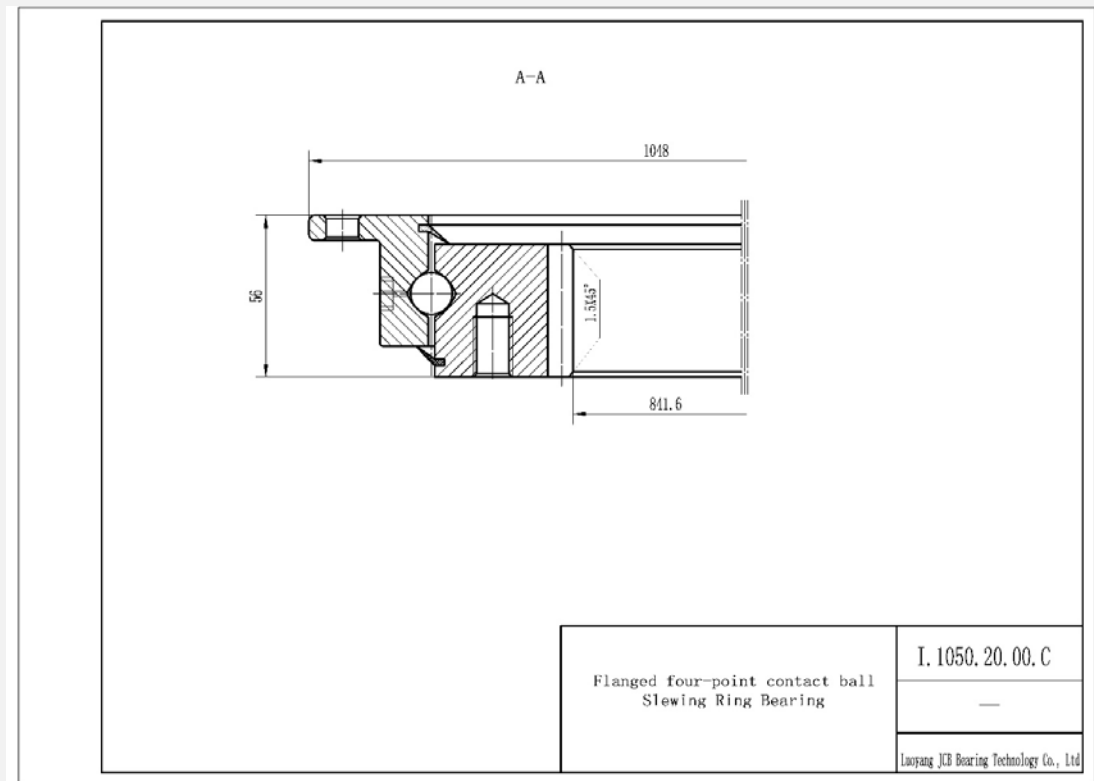


01-2

Luoyang JCB Bearing Technology Company Limited

SPECIFICATION



I.1050.20.00.C

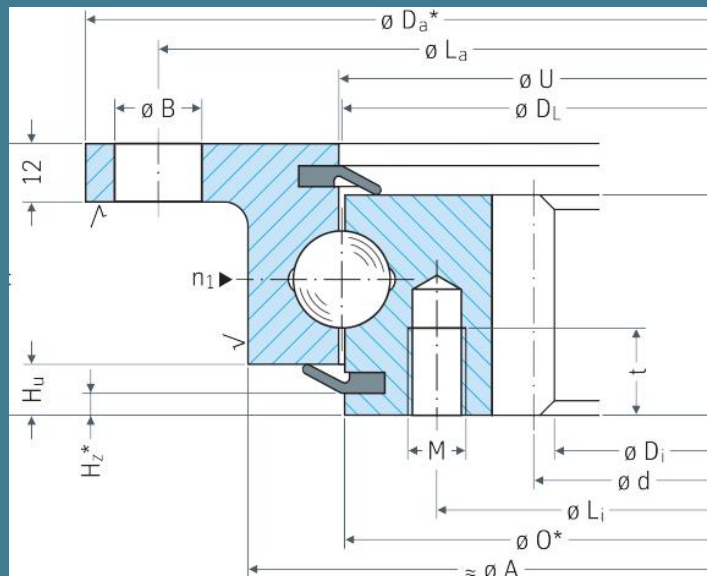

Inner diameter (D_i) : 841.6
 Outer diameter (D_a) : 1048
 Overall height (H) : 56
 Outer ring height (b) : 46
 Distance at bottom outer ring (H_u) : 10
 Height (H_3) : 12
 Weight: 65 KG
 External bolt circle dia (L_a) : 1020
 Number of bolt holes per hole circle (n_a) : 16
 External bolt hole type : Selected by user
 External bolt hole diameter (B) : 18
 Internal bolt circle dia (L_i) : 905
 Number of bolt holes per hole circle (n_i) : 22
 Internal bolt hole type : Selected by user
 Internal bolt hole diameter (M) : M20
 Tooth number (z) : 107
 Module of gear (m) : 8
 Tooth width (b) : 46