



**Luoyang JCB Bearing Technology Company Limited**

**L6-29N9ZD**

# **SLEWING BEARING**

**FLANGED FOUR-POINT CONTACT BALL SLEWING BEARING**





# Luoyang JCB Bearing Technology Company Limited

## CONTENTS

01.

[MAIN SPECIFICATION](#)

02.

[TECHNICAL INFORMATION](#)

03.

[MANUFACTURE & INSPECTION](#)

04.

[PACKING AND STORAGE](#)

05.

[WARRANTY & CERTIFICATE](#)



**Luoyang JCB Bearing Technology Company Limited**

**L6-29N9ZD**

01

## MAIN SPECIFICATION



[REFERENCE DRAWING](#)



[LUBRICATIONA](#)



[SPECIFICATION](#)



[BOLT HOLES TYPE & BOLTS](#)



[RAW MATERIAL](#)



[CORROSION PROTECTION](#)




**Luoyang JCB Bearing Technology Company Limited**

**L6-29N9ZD**

## REFERENCE DRAWING

This drawing is reference for user, if user request for formal drawing , please contact with us: [sales@jcb-bearing.com](mailto:sales@jcb-bearing.com), the official drawing will be submitted to them.

01-1

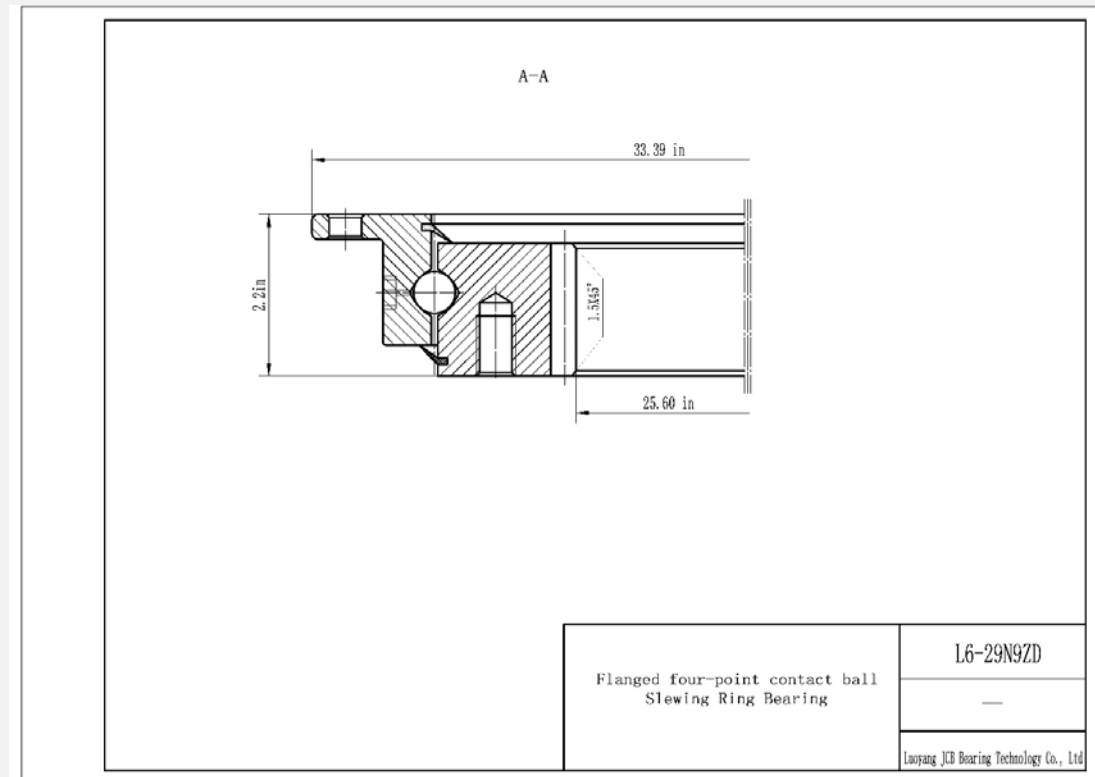



01-2

# Luoyang JCB Bearing Technology Company Limited

## SPECIFICATION



### L6-29N9ZD

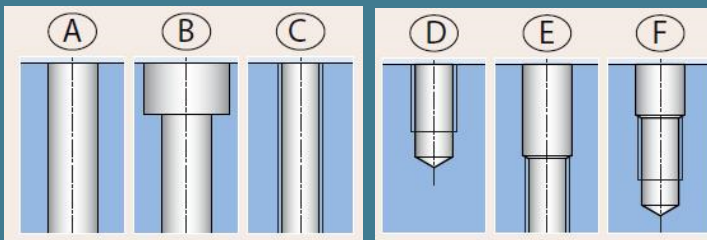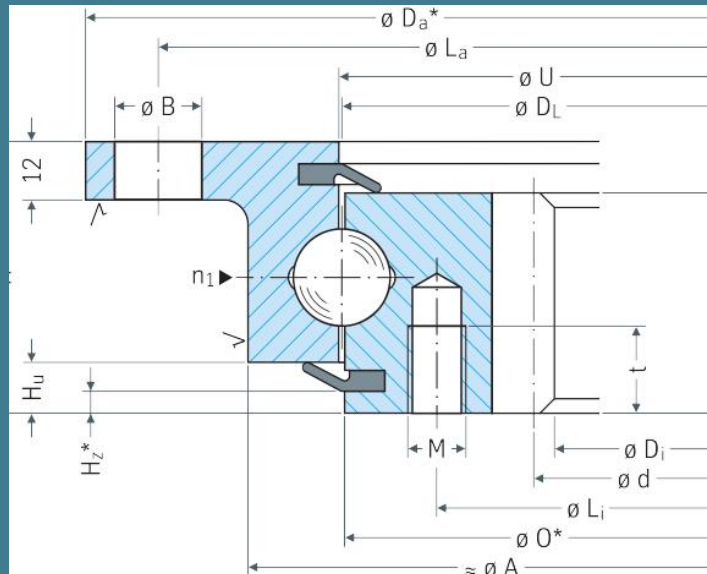

Inner diameter (Di) : 25.60 in  
 Outer diameter (Da) : 33.39 in  
 Overall height (H) : 2.20 in  
 Outer ring height (b): 1.79 in  
 Distance at bottom outer ring(Hu): 0.41 in  
 Height(H3): 0.47 in  
 Weight: 112 lbs  
 External bolt circle dia (La) : 32.25 in  
 Number of bolt holes per hole circle (na) : 15  
 External bolt hole type : Selected by user  
 External bolt hole diameter(B) : 11/16 in  
 Internal bolt circle dia(Li): 27.63 in  
 Number of bolt holes per hole circle(ni):18  
 Internal bolt hole type : Selected by user  
 Internal bolt hole diameter (M) : 1/2-13UNC in  
 Tooth number(z) :104  
 Module of gear(DP):4  
 Tooth width (b) : 1.79 in