



Luoyang JCB Bearing Technology Company Limited

RK6-22N1Z

SLEWING BEARING

FLANGED FOUR-POINT CONTACT BALL SLEWING BEARING





Luoyang JCB Bearing Technology Company Limited

CONTENTS

01.

[MAIN SPECIFICATION](#)

02.

[TECHNICAL INFORMATION](#)

03.

[MANUFACTURE & INSPECTION](#)

04.

[PACKING AND STORAGE](#)

05.

[WARRANTY & CERTIFICATE](#)



Luoyang JCB Bearing Technology Company Limited

RK6-22N1Z

01

MAIN SPECIFICATION



[REFERENCE DRAWING](#)



[SPECIFICATION](#)



[RAW MATERIAL](#)



[LUBRICATION](#)



[BOLT HOLES TYPE & BOLTS](#)



[CORROSION PROTECTION](#)




Luoyang JCB Bearing Technology Company Limited

RK6-22N1Z

REFERENCE DRAWING

This drawing is reference for user, if user request for formal drawing , please contact with us: sales@jcb-bearing.com, the official drawing will be submitted to them.

01-1

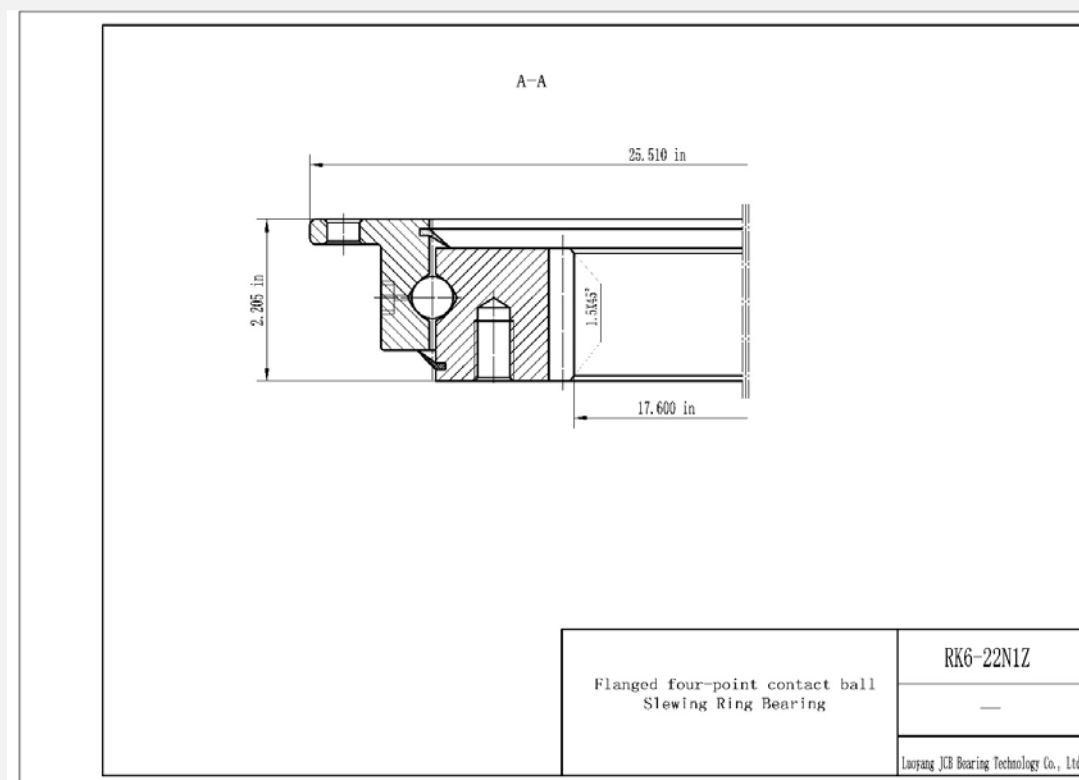


01-2

Luoyang JCB Bearing Technology Company Limited

SPECIFICATION



RK6-22N1Z

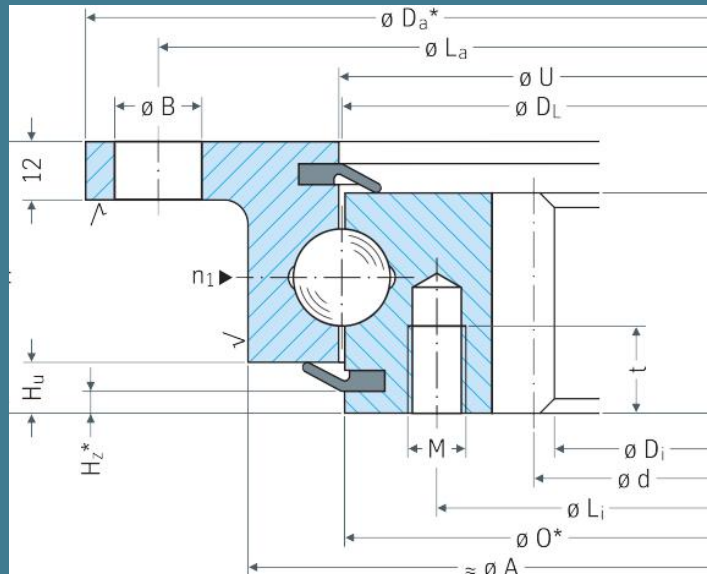

Inner diameter (D_i) : 17.600 in
 Outer diameter (D_a) : 25.510 in
 Overall height (H) : 2.205 in
 Outer ring height (b): 1.811 in
 Distance at bottom outer ring(H_u): 0.394 in
 Height(H_3): 0.47 in
 Weight: 90 lbs
 External bolt circle dia (L_a) : 24.380 in
 Number of bolt holes per hole circle (n_a) :10
 External bolt hole type : Selected by user
 External bolt hole diameter(B) : 0.688 in
 Internal bolt circle dia(L_i): 19.630 in
 Number of bolt holes per hole circle(n_i):15
 Internal bolt hole type : Selected by user
 Internal bolt hole diameter (M) : 0.500-13UNC-2B in
 Tooth number(z) :72
 Module of gear(DP) :4
 Tooth width (b) : 1.811 in