



Luoyang JCB Bearing Technology Company Limited

VLA200844-N-VSP

SLEWING BEARING

FLANGED FOUR-POINT CONTACT BALL SLEWING BEARING





Luoyang JCB Bearing Technology Company Limited

CONTENTS

01.

[MAIN SPECIFICATION](#)

02.

[TECHNICAL INFORMATION](#)

03.

[MANUFACTURE & INSPECTION](#)

04.

[PACKING AND STORAGE](#)

05.

[WARRANTY & CERTIFICATE](#)



Luoyang JCB Bearing Technology Company Limited

VLA200844-N-VSP

01

MAIN SPECIFICATION



[REFERENCE DRAWING](#)



[LUBRICATIONA](#)



[SPECIFICATION](#)



[BOLT HOLES TYPE & BOLTS](#)



[RAW MATERIAL](#)



[CORROSION PROTECTION](#)




Luoyang JCB Bearing Technology Company Limited

VLA200844-N-VSP

REFERENCE DRAWING

This drawing is reference for user, if user request for formal drawing , please contact with us: sales@jcb-bearing.com, the official drawing will be submitted to them.

01-1

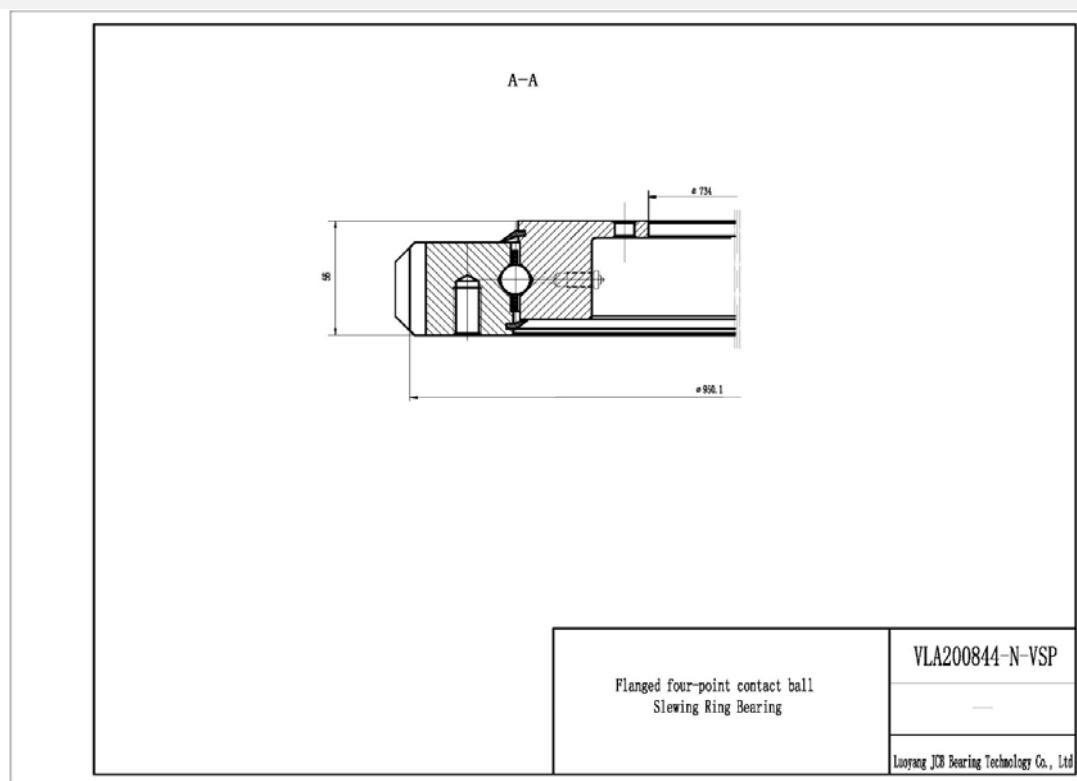



01-2

Luoyang JCB Bearing Technology Company Limited

SPECIFICATION



VLA200844-N-VSP

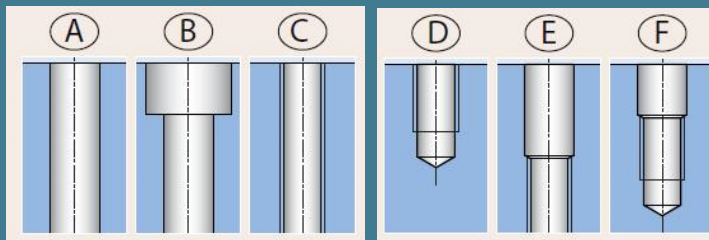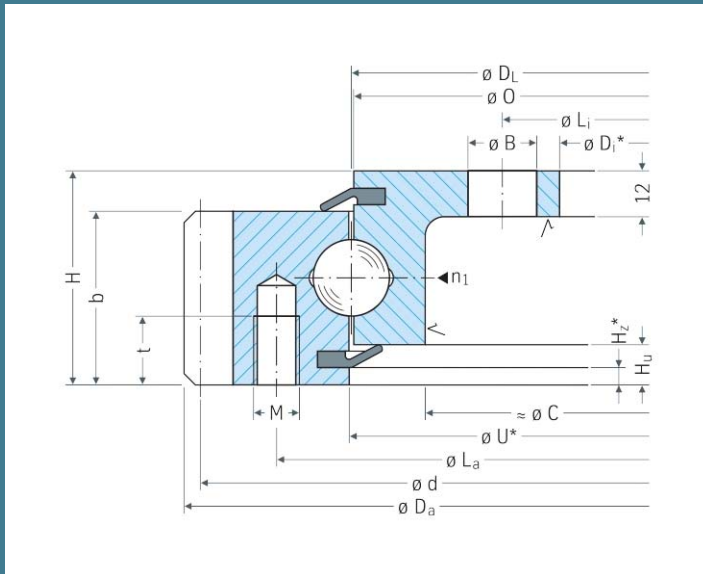

Inner diameter (D_i) : 734
 Outer diameter (D_a) : 950.1
 Overall height (H) : 56
 Outer ring height (b): 44.5
 Distance at bottom inner ring(H_u): 8.5
 Height(H_4): 12
 Weight: 65.5 KG
 External bolt circle dia (L_a) : 885
 Number of bolt holes per hole circle (n_a) : 18
 External bolt hole type : Selected by user
 External bolt hole diameter(M) : M12
 Internal bolt circle dia(L_i): 762
 Number of bolt holes per hole circle(n_i): 18
 Internal bolt hole type : Selected by user
 Internal bolt hole diameter (B) : 18
 Tooth number(z) : 117
 Module of gear(m) : 8
 Tooth width (b) : 44.5