



**Luoyang JCB Bearing Technology Company Limited**

**VLI200414-N-VSP**

# **SLEWING BEARING**

**FLANGED FOUR-POINT CONTACT BALL SLEWING BEARING**





# Luoyang JCB Bearing Technology Company Limited

## CONTENTS

01.

[MAIN SPECIFICATION](#)

02.

[TECHNICAL INFORMATION](#)

03.

[MANUFACTURE & INSPECTION](#)

04.

[PACKING AND STORAGE](#)

05.

[WARRANTY & CERTIFICATE](#)



**Luoyang JCB Bearing Technology Company Limited**

**VLI200414-N-VSP**

01

## MAIN SPECIFICATION



[REFERENCE DRAWING](#)



[LUBRICATIONA](#)



[SPECIFICATION](#)



[BOLT HOLES TYPE & BOLTS](#)



[RAW MATERIAL](#)



[CORROSION PROTECTION](#)




**Luoyang JCB Bearing Technology Company Limited**

**VLI200414-N-VSP**

## REFERENCE DRAWING

This drawing is reference for user, if user request for formal drawing , please contact with us: [sales@jcb-bearing.com](mailto:sales@jcb-bearing.com), the official drawing will be submitted to them.

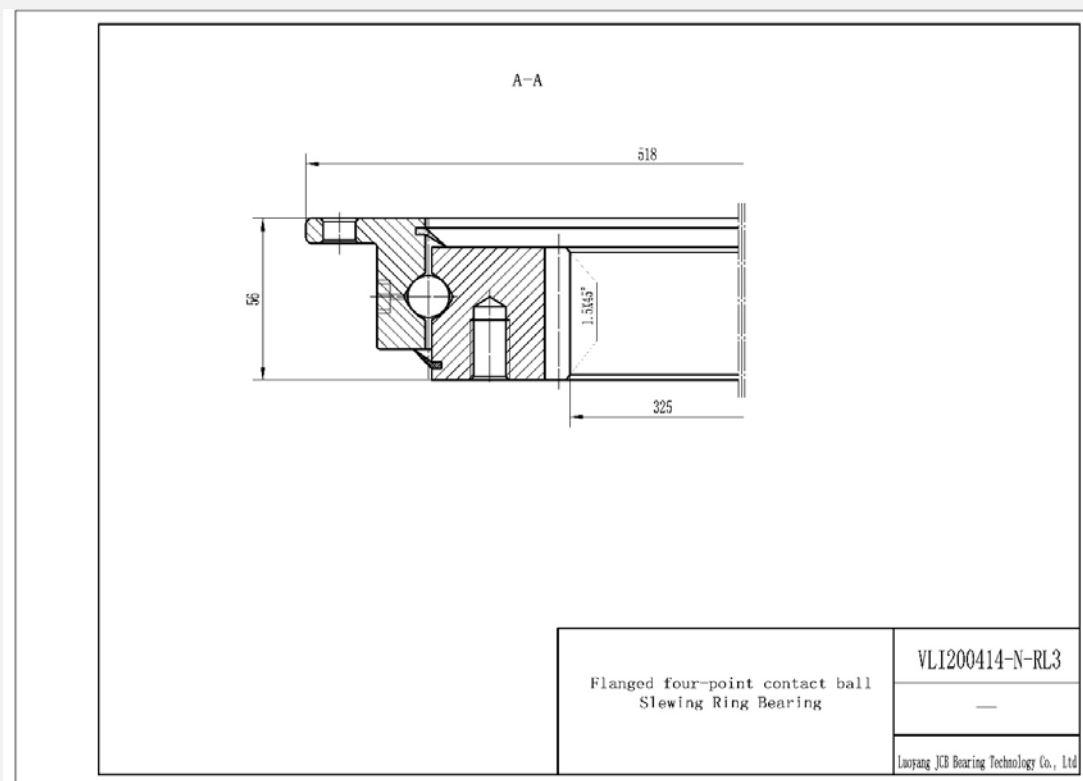


01-2

# Luoyang JCB Bearing Technology Company Limited

## SPECIFICATION



### VLI200414-N-VSP

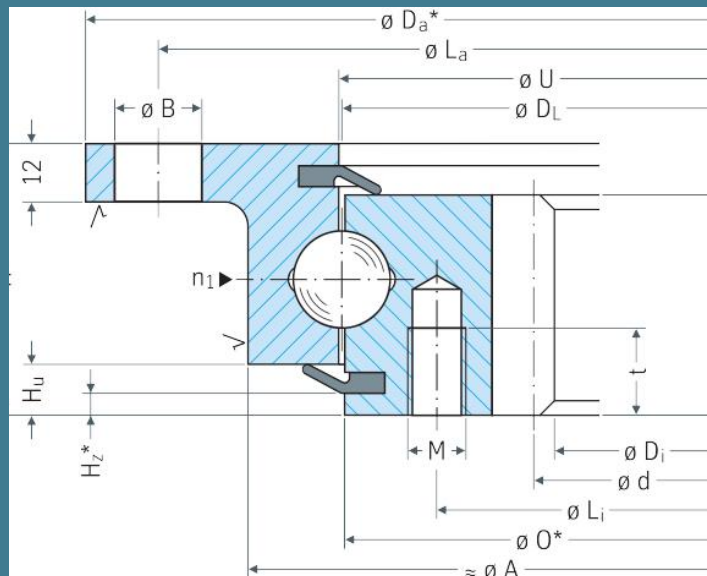

Inner diameter ( $D_i$ ) :325  
 Outer diameter ( $D_a$ ) :518  
 Overall height ( $H$ ) :56  
 Outer ring height ( $b$ ):44.5  
 Distance at bottom outer ring( $H_u$ ):8.5  
 Height( $H_3$ ):12  
 Weight: 27.5 KG  
 External bolt circle dia ( $L_a$ ) : 490  
 Number of bolt holes per hole circle ( $n_a$ ) :8  
 External bolt hole type : Selected by user  
 External bolt hole diameter( $B$ ) :18  
 Internal bolt circle dia( $L_i$ ): 375  
 Number of bolt holes per hole circle( $n_i$ ): 12  
 Internal bolt hole type : Selected by user  
 Internal bolt hole diameter ( $M$ ) :M12  
 Tooth number( $z$ ) :67  
 Module of gear( $m$ ) :5  
 Tooth width ( $b$ ) : 44.5