



Luoyang JCB Bearing Technology Company Limited

VLI200844-N-VSP

SLEWING BEARING

FLANGED FOUR-POINT CONTACT BALL SLEWING BEARING





Luoyang JCB Bearing Technology Company Limited

CONTENTS

01.

[MAIN SPECIFICATION](#)

02.

[TECHNICAL INFORMATION](#)

03.

[MANUFACTURE & INSPECTION](#)

04.

[PACKING AND STORAGE](#)

05.

[WARRANTY & CERTIFICATE](#)



Luoyang JCB Bearing Technology Company Limited

VLI200844-N-VSP

01

MAIN SPECIFICATION



[REFERENCE DRAWING](#)



[SPECIFICATION](#)



[RAW MATERIAL](#)



[LUBRICATIONA](#)



[BOLT HOLES TYPE & BOLTS](#)



[CORROSION PROTECTION](#)




Luoyang JCB Bearing Technology Company Limited

VLI200844-N-VSP

REFERENCE DRAWING

This drawing is reference for user, if user request for formal drawing , please contact with us: sales@jcb-bearing.com, the official drawing will be submitted to them.

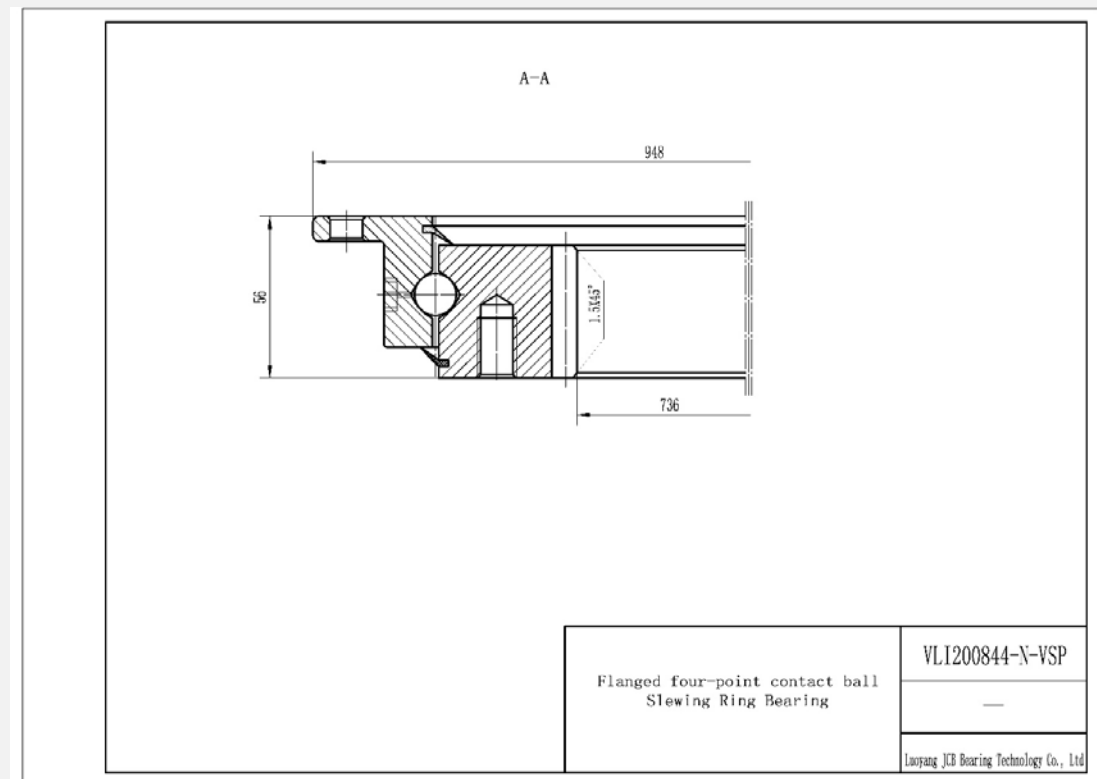


01-2

Luoyang JCB Bearing Technology Company Limited

SPECIFICATION



VLI200844-N-VSP

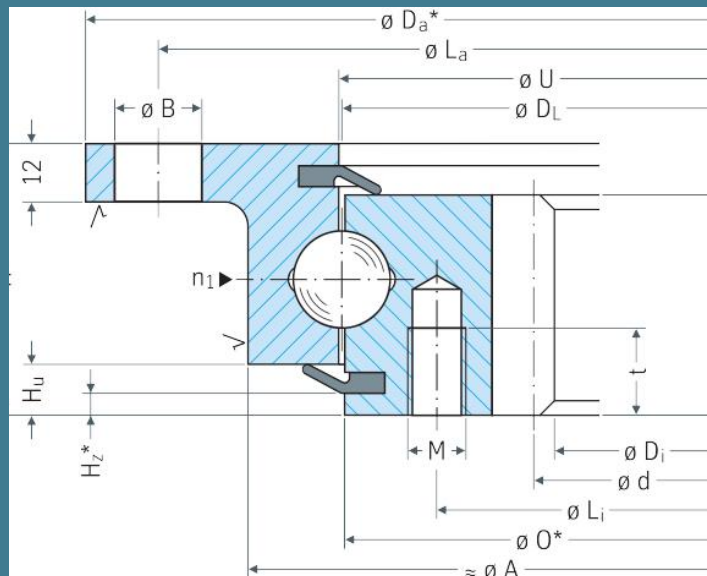

- Inner diameter (D_i) : 736
- Outer diameter (D_a) : 948
- Overall height (H) : 56
- Outer ring height (b): 44.5
- Distance at bottom outer ring(H_u): 8.5
- Height(H_3): 12
- Weight: 61.5 KG
- External bolt circle dia (L_a) : 920
- Number of bolt holes per hole circle (n_a) : 14
- External bolt hole type : Selected by user
- External bolt hole diameter(B) : 18
- Internal bolt circle dia(L_i): 805
- Number of bolt holes per hole circle(n_i): 20
- Internal bolt hole type : Selected by user
- Internal bolt hole diameter (M) : M12
- Tooth number(z) : 94
- Module of gear(m) : 8
- Tooth width (b) : 44.5